
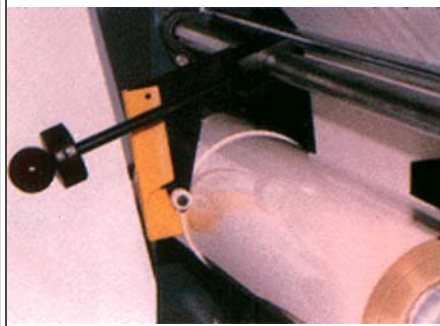


THE STANDARD F30 & F38 LAMINATOR


Features flat composition wood grain laminated table - 3" diameter silicone rubber rolls top-bottom stick resistant to most all adhesives, -forward- brake and reverse variable D.C. control from 0-350 inches per minute. Start-Stop operated from control panel or the O.S.H.A. approved foot switch - All Standard.

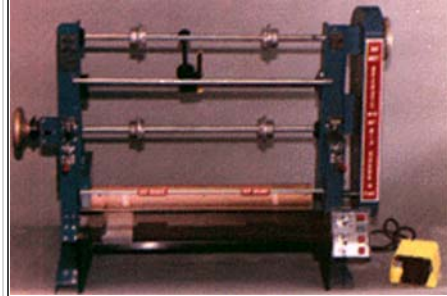

Precision pre-slitting of laminate to exact widths with slitting attachment - Standard Equipment.


A truly unique, inexpensive over laminating machine of rugged design to give years of dependable service.

Easy to understand variable speed control panel with easily accessible safety fuses.

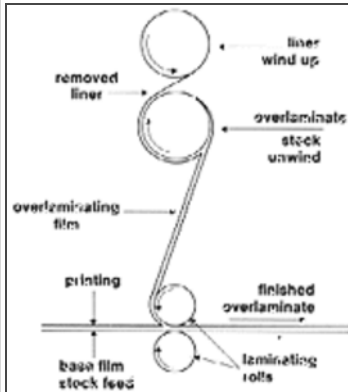

Schematic

OPTIONAL FEATURES FOR F-30 & F-38 LAMINATORS

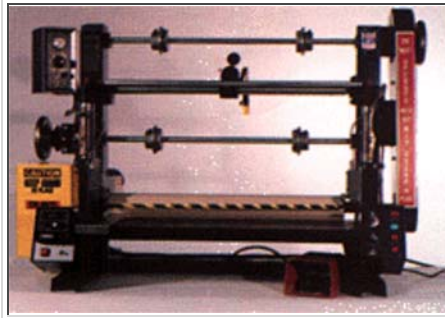


F-38" equipped with air nips - silicone rubber top nip roll heated. Also available in steel. Heat options: 220 volts - 20 amp - single phase - maximum temperature is 350 F.

F-30" equipped with lower unwind-rewind stand for laminating materials roll to roll. Maximum Roll Diameter - Unwind 15". Maximum Roll Diameter - Rewind 18".



Edge Guide System.

F-38" equipped with air nips.
Air Requirements: 80 psi max.

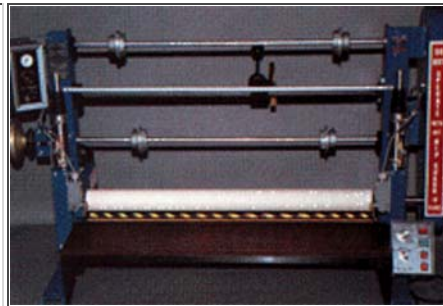

SPECIFICATIONS F-30" / F-38"

Shipping Weights

30" 460 lbs.

38" 520 lbs.

Electrical Requirements 110-120 volts A.C. - 50-60 HZ

Maximum Roll Opening 2"

Space Requirements

30" 43" wide x 26" deep x 36" high

38" 51" wide x 26" deep x 36" high

Maximum Laminate Roll Diameter 10"

Maximum Laminate Width

30" 30"

38" 38"

Nip Roll Width

30" 30 5/8"

38" 38 5/8"

Core Size 3"

Shipped in wooden crate at no extra charge

Shipped F.O.B. Stow, Ohio

Optional Equipment

Lower Unwind

Rewind Stand

Heat Option - 3" Diameter Top Nip Roll / Silicone Rubber or Chrome Plated Steel

Edge Guide System

Air Nips